
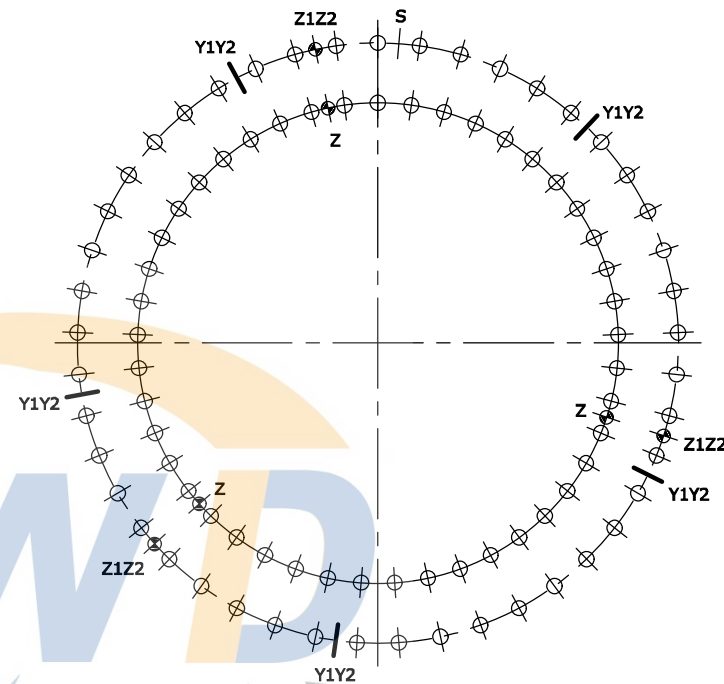



6.3/  
U.O.N

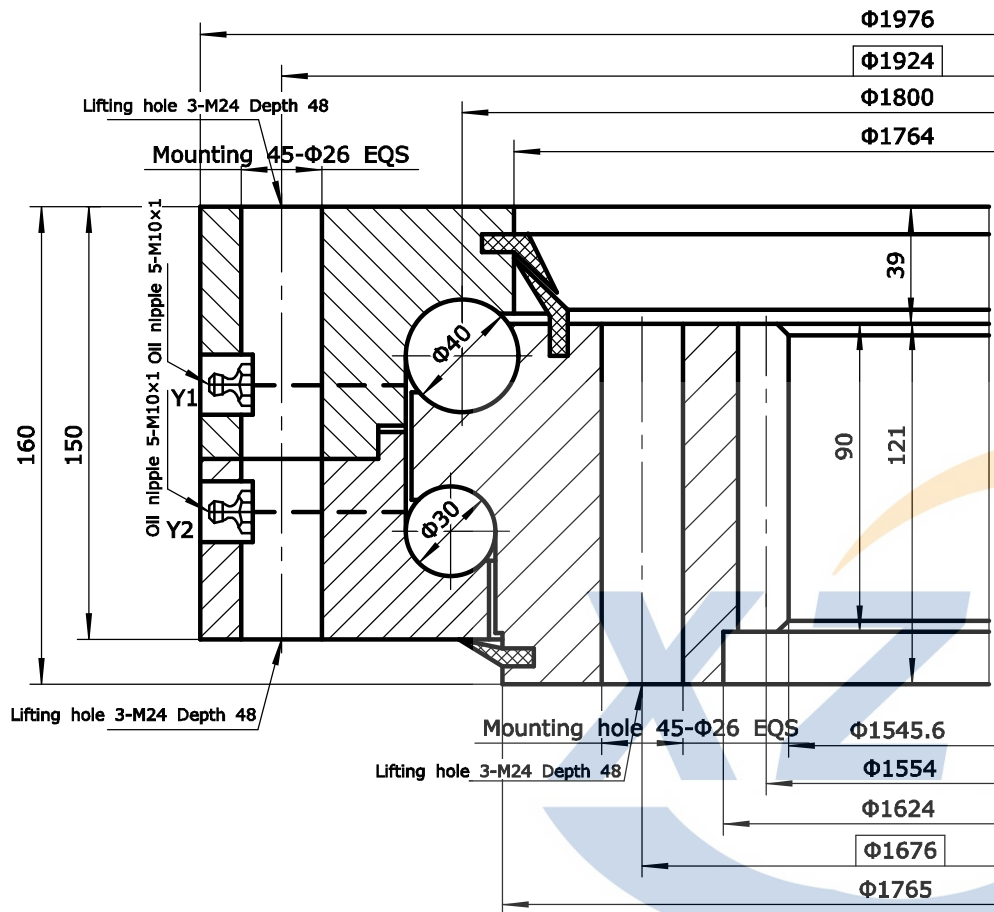

- Notes:**
1. Raceway of inner & outer ring induction hardened. hardness: 55~62HRC  
Depth ≥ 3.5mm
  2. Inner & outer ring quenched & tempered, hardness: 207~262HB

Gear Data				Design		Check		Machine tolerances without notes				Model	023.40.1800		Weight	820kg		
Module	m	14	Gear heat treatment requirements		Date	Approve						Name	Slewing Bearing	Qty		Scale		
Teeth no	z	111	HRC		Qty	Size	Axial clearance	0.10~0.40		≤200	≤500	≤710	≤1120	Material	50Mn	Total 1 page	The 1st page	
Teeth pressure angle	α	20°	Precision(GB10095-88)	10	Inner ring mounting hole	45	Φ26	Radial clearance	0.20~1.00	±0.30	±0.40	±0.50	±0.65	<p style="text-align: center;"><b>XUZHOU WANDA SLEWING BEARING CO.,LTD</b></p>  <p>Fax: +86 516 83309366 Fax: +86 516 83915766 http://www.slew-bearing.com</p>				
Modification coefficients	x	+0.5			Outer ring mounting hole	45	Φ26			≤1600	≤2000	≤2500	≤3150					
Reduction coefficients	km	2.8			Oil hole	2×5	M10×1			±0.80	±0.95	±1.10	±1.35					
Pitch diameter	d	1554									≤4000	≤5000						
										±1.65	±2.0							
				T:Pulg location S:Soft zone Y:Oil hole Z:Lifting hole				Technical processing standards without notes according to ...JB/T2300-2011										